




www.mawalighting.com

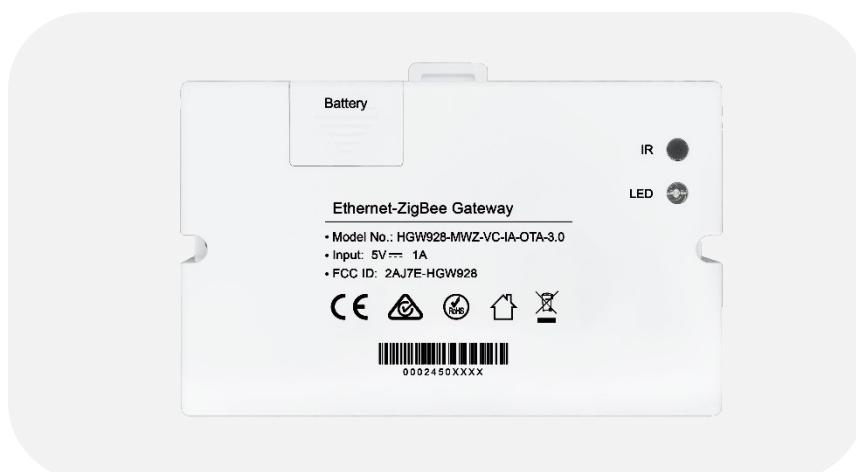

Magic Wand

Gateway HGW928-VC

Up to support 150 Magic Wand luminaires



ZigBee Mesh
Network Control



Zoning & Grouping



Magic Wand
Remote Control



Dimming Control



ON/OFF

CE RoHS




Applications

- Shopping
- Office
- Manufacture
- Mall/Warehouse
- Exhibition Hall
- Station

Features

- Embedded 100M Ethernet Controller.
- ZigBee mesh network smart controls.
- Input voltage 5V, micro USB adapter.
- 1 Administrator account.
- Supports 50 Grp group
- 120 scenarios are supported.
- 16 devices or groups per scenario.
- Supports 180 timing slices.
- Each time slice supports 10 devices or groups.
- Support POE power supply (special POE version).
- Support OTA upgrade.
- Up to support 150 Magic Wand luminaires

System Diagram

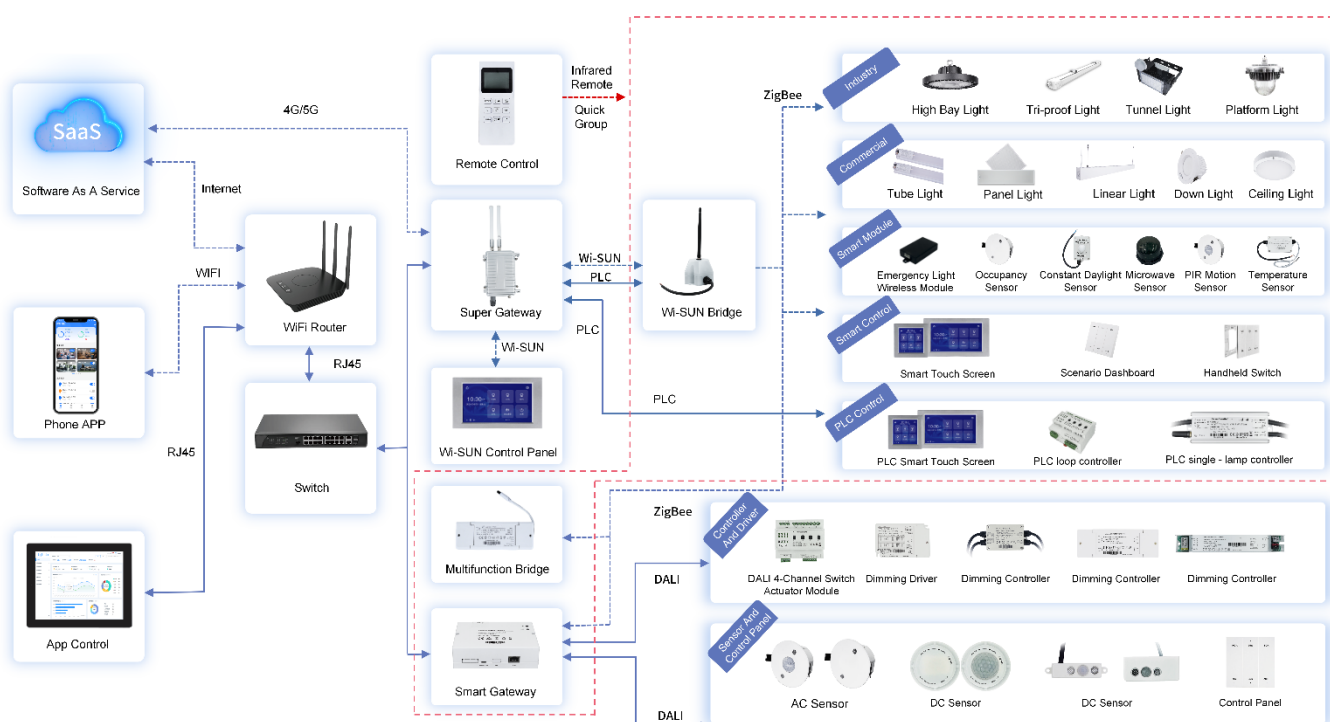



Product Data

General Information

Protection class IEC	IP20
Warranty	5 Years Warranty
Certificate	CE, RoHS

Application Conditions

Operating Temperature	-20 °C to ~ 55 °C
-----------------------	-------------------


Mechanical and Housing

Structure Material	PC V0
Fixture Color	White

Operating and Electrical

Input	DC 5V (1A MAX)
Ethernet	100M
Frequency	2.4GHz
Standby Power	<0.5W
Surge Protection	1KV
Isolation Voltage	3750V
Infrared Receiving Distance	5m
Control Distance	IA、EA、EAC : 30m BEA、BEAC : 100m


Wire Connection

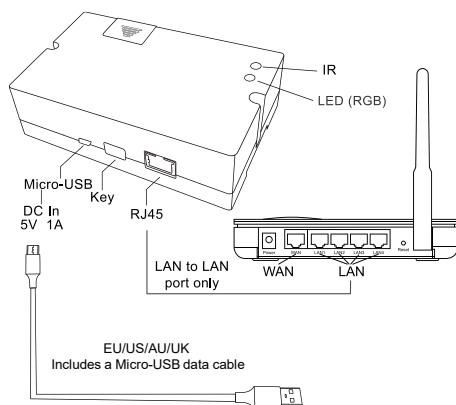


HGW928-MWZ-VC-XX-XX-OTA-3.0




Product Dimensions

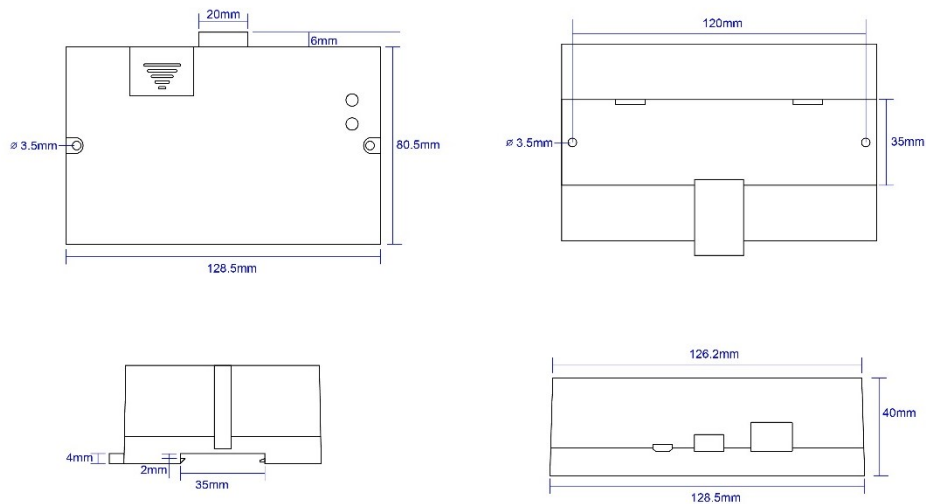

External Antenna Dimensions(Unit:mm)

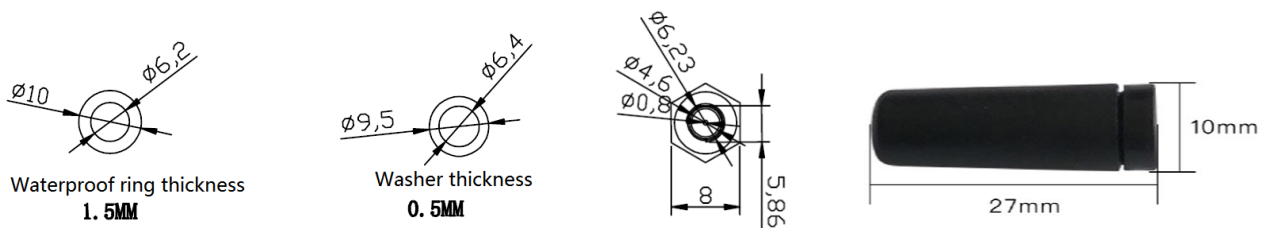

External Cable Dimensions (Unit:mm)

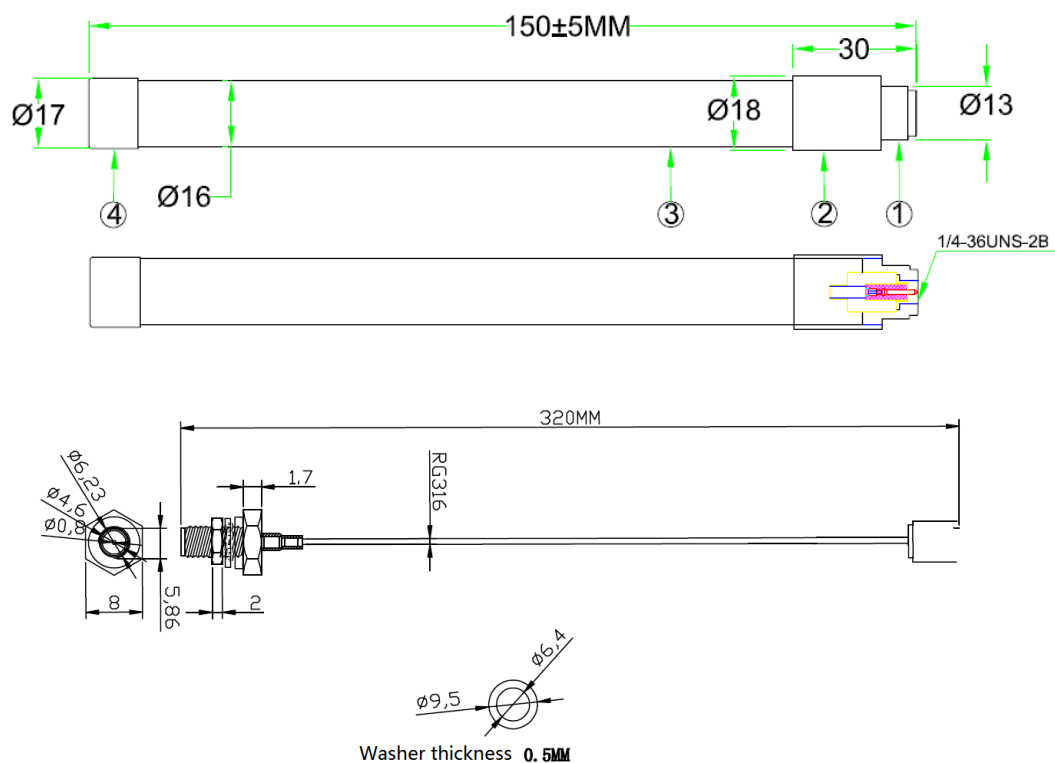




Button function

The key functions on the gateway are:

- Short press (<3 seconds) to send gateway information to the application software.
- Long press (>3 seconds and <8 seconds) to restore the login password of this gateway to 00000000 and set the gateway to DHCP mode.
- Long press (>10 seconds) to clear the association between the gateway and the SaaS account.

LED Indicator

- The LED of gateway can do:
- RED LED - Indicates that the gateway connection fails
- Green LED - Indicates that the gateway is successfully connected
- Red/Green LED Flash - Searching for ZigBee devices

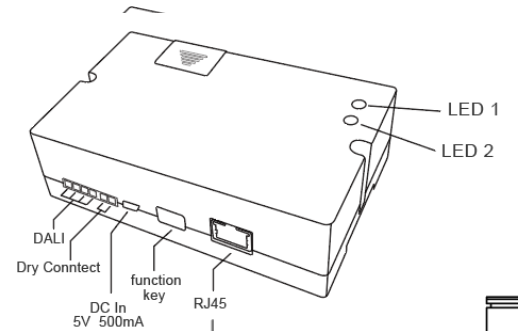


Battery

The gateway uses CR2032 batteries to power the real-time clock, so

- When the gateway is not connected to the Internet or mobile phone, the gateway power off and then power on again, the timing in the gateway can continue to work.
- When the battery is low, the application software displays a low battery warning.

Installation instructions

- Set up a LAN environment: routers, switches, gateways, and servers are all on the same LAN.
- The network cable used by a gateway to connect to a router or switch must be less than 100m long.
- There should be at least 30cm of space between the gateway and the router.
- If the gateway is enclosed in a metal box, use an external antenna extension cable and install the antenna head outside of the metal box (as iron can shield signals).
- External antenna version installation guide.

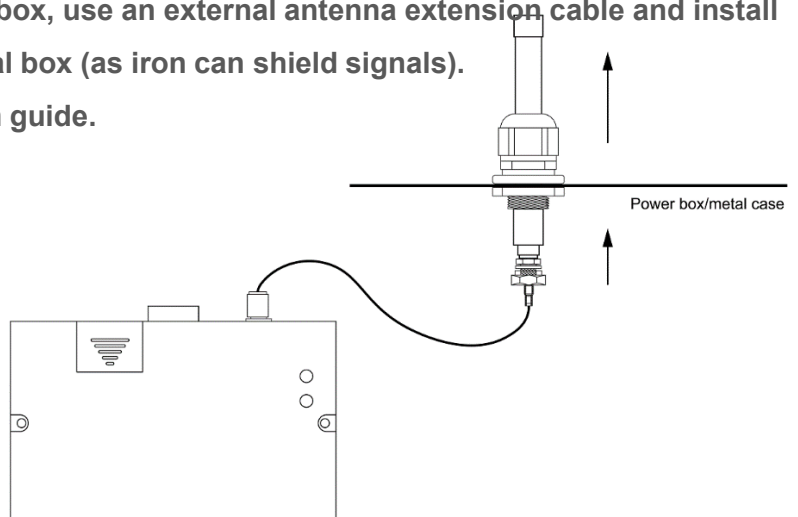



Software Operation


- Download the iLightsin Sync app from the APP store then install the app.
- Open the installed iLightsin Sync app after the gateway is powered on.
- Register an account and log in to the gateway.
- For detailed software operations, refer to the "iLightsin Sync Operation Manual.pdf"

Parameters

Adapter	EU(100-240Vac)	US(100-277Vac)	UK(100-240Vac)	AU(100-240Vac)	CN(100-240Vac)
Model	HGW928-MWZ-VC-IA-EU-OTA-3.0	HGW928-MWZ-VC-IA-US-OTA-3.0	HGW928-MWZ-VC-IA-UK-OTA-3.0	HGW928-MWZ-VC-IA-AU-OTA-3.0	HGW928-MWZ-VC-IA-CN-OTA-3.0
	HGW928-MWZ-VC-EA-EU-OTA-3.0	HGW928-MWZ-VC-EA-US-OTA-3.0	HGW928-MWZ-VC-EA-UK-OTA-3.0	HGW928-MWZ-VC-EA-AU-OTA-3.0	HGW928-MWZ-VC-EA-CN-OTA-3.0
	HGW928-MWZ-VC-EAC-EU-OTA-3.0	HGW928-MWZ-VC-EAC-US-OTA-3.0	HGW928-MWZ-VC-EAC-UK-OTA-3.0	HGW928-MWZ-VC-EAC-AU-OTA-3.0	HGW928-MWZ-VC-EAC-CN-OTA-3.0
	HGW928-MWZ-VC-BEA-EU-OTA-3.0	HGW928-MWZ-VC-BEA-US-OTA-3.0	HGW928-MWZ-VC-BEA-UK-OTA-3.0	HGW928-MWZ-VC-BEA-AU-OTA-3.0	HGW928-MWZ-VC-BEA-CN-OTA-3.0
	HGW928-MWZ-VC-BEAC-EU-OTA-3.0	HGW928-MWZ-VC-BEAC-US-OTA-3.0	HGW928-MWZ-VC-BEAC-UK-OTA-3.0	HGW928-MWZ-VC-BEAC-AU-OTA-3.0	HGW928-MWZ-VC-BEAC-CN-OTA-3.0
Input	DC 5V (1A MAX)				
Ethernet	100M				
Frequency	2.4GHz				
Control Distance	IA、EA、EAC：30m				
	BEA、BEAC：100m				
Infrared Remote Control Distance	5m				
Operating Temperature	-20℃ ~ 55℃				
Weight (Only Gateway)	140g (no external Antenna)				
Weight (Package)	273g (no external Antenna) Small Antenna:+8g Big Antenna: +57g External Cable:+17g	273g (no external Antenna) Small Antenna:+8g Big Antenna: +57g External Cable:+17g	277g (no external Antenna) Small Antenna:+8g Big Antenna: +57g External Cable:+17g	270g (no external Antenna) Small Antenna:+8g Big Antenna: +57g External Cable:+17g	273g (no external Antenna) Small Antenna:+8g Big Antenna: +57g External Cable:+17g
Size	128.5*80.5*40mm				
Package Size	189*102*66mm				
Package	1PCS/package				
Housing Material	PC V0				




Operation Settings

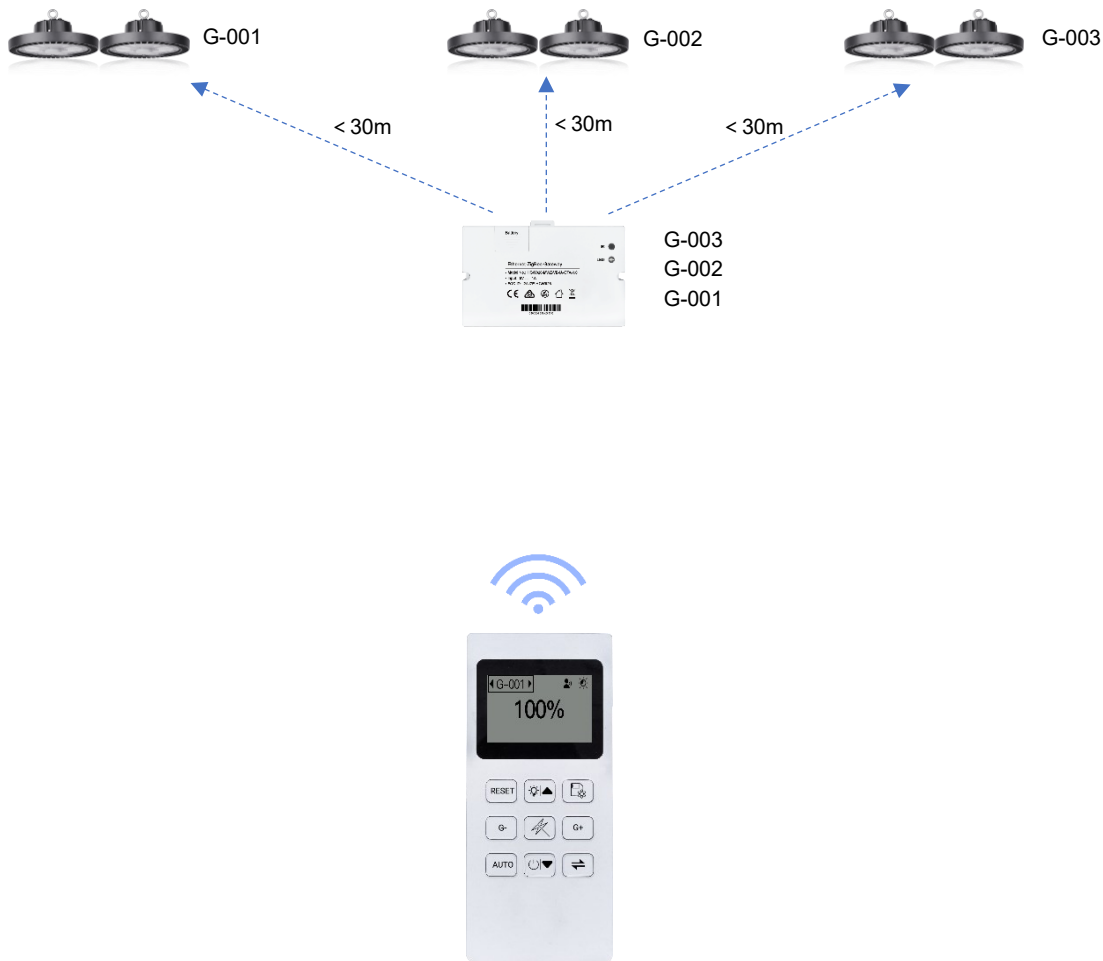



After adding the Gateway to the G-001 group using the Magic Wand smart remote control, the G-002 and G-003 groups are automatically created. The smart touch screen can control the lights in the G-001, G-002, and G-003 groups. The distance between the touch screen and the lights in the three groups should not exceed 30 meters.



Typical Working Scenarios

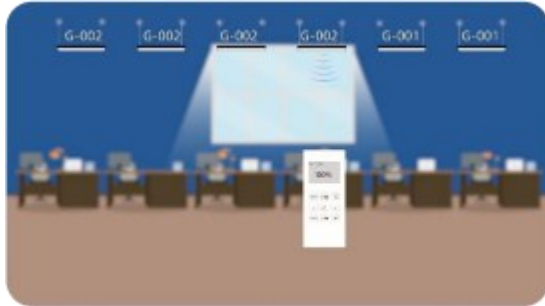

The “Magic Wand” smart lamps of HOMA are embedded with motion sensor and daylight sensor, using a “Magic Wand” remote control, users can set grouping and parameters very fast and convenient. By adopting the standard ZigBee technology, “Magic Wand” has the inborn advantages like long transmission distance, multiple channels and mesh network.

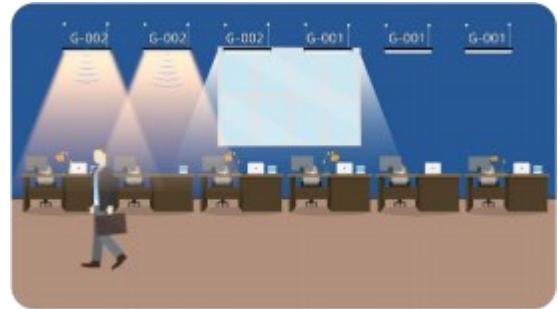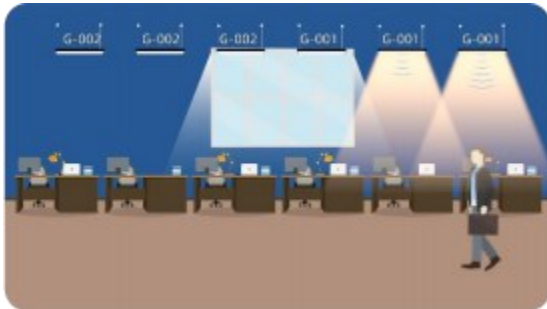

Users can set the sensor parameters of one group or individual lamp with one button, and change lamp brightness. In one group, the motion sensors work together to control these grouped lamps, and the daylight sensors control the individual lamps on/off according to the ambient brightness.

The magic wand serial include panel, linear light, tri-proof light, highbay, LED tube. This kind of smart lamps can be used for industrial and commercial area, example offices, warehouses, factories, parking and others.