

7-RAINBOW[®] | LED Linear Track Lighting System

LED Linear Track Lighting System



15W/20W/25W/30W 40W/45W/50W/55W 50W/55W/60W/65W

Tiltable linear track light

60° UGR<19

Compatible with 4 wires track rail system



140lm Per Watt

3000K/4000K/5000K/6000K

600mm/1200mm/1500mm

The luminaires are compatible with most European standard 3phase 4wires track rail system.

EUROPEAN STANDARD--4 WIRES / 3 PHASES

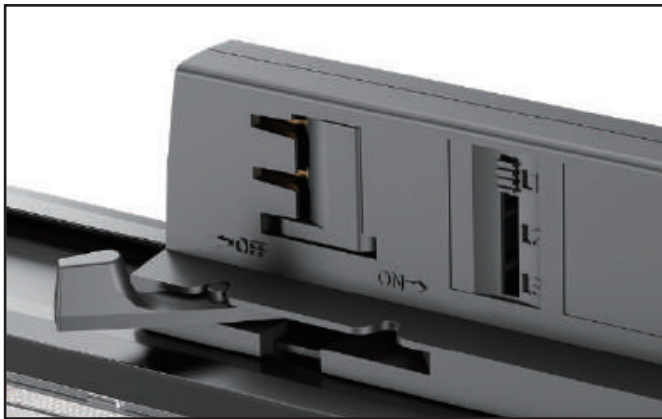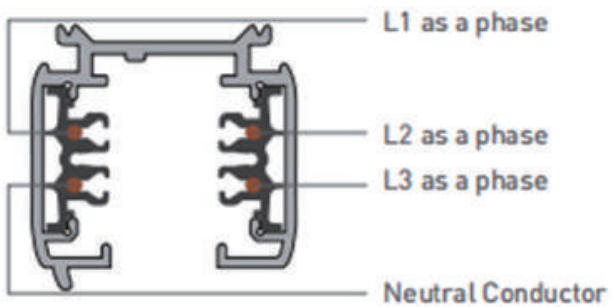

PHASE SELECTION ADAPTOR

Easy to switch back and forth between lights

OUTPUT SELECTABLE LED DRIVER

Adjust the brightness of the light as needed




3CCT Selectable Switch (Optional)

Help to reduce the SKUs and stocks

OPTIC LENS:



MD-60° Medium

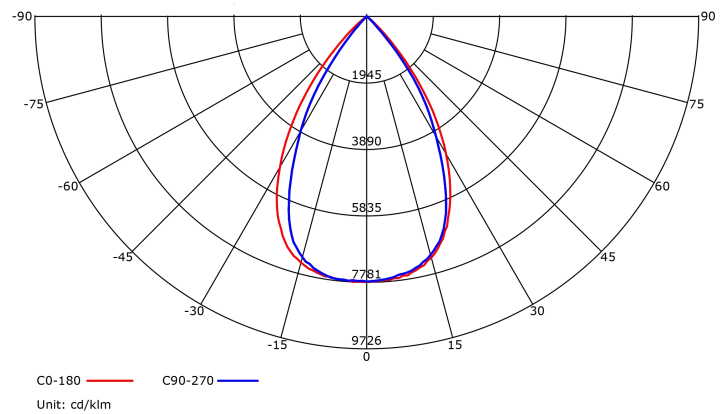

Order Code

Category	Type	Track System	Length	Power	CCT	Wire	Color
	X	X	X	X	X	X	X
TH-TL	37	4	06	30	30	04	WH
			12	55	35		BK
			15	65	40		
					50		
					60		
					65		

Code Definition

TH-TL= Rainbow Linear Track Light

Length:

06=600mm

12=1200mm

15=1500mm

Wire:

04=4 wires

Color of the housing:

WH=white shell

BK=black shell

Power:

30,55,65=30W,55W,65W

CCT:

30=3000k




35=3500k

40=4000k

50=5000k

57=5700k

65=6500k




LED Linear Lighting System

Safety notes:


Installation must be performed only by qualified electricians

Make sure that the fixture is disconnected from the AC supply

This luminaire is to be installed in 3phases 4-wires Track rail system

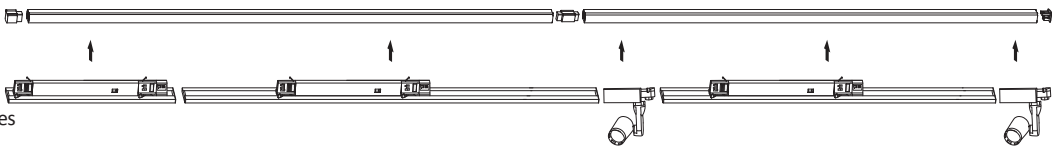


Installation:

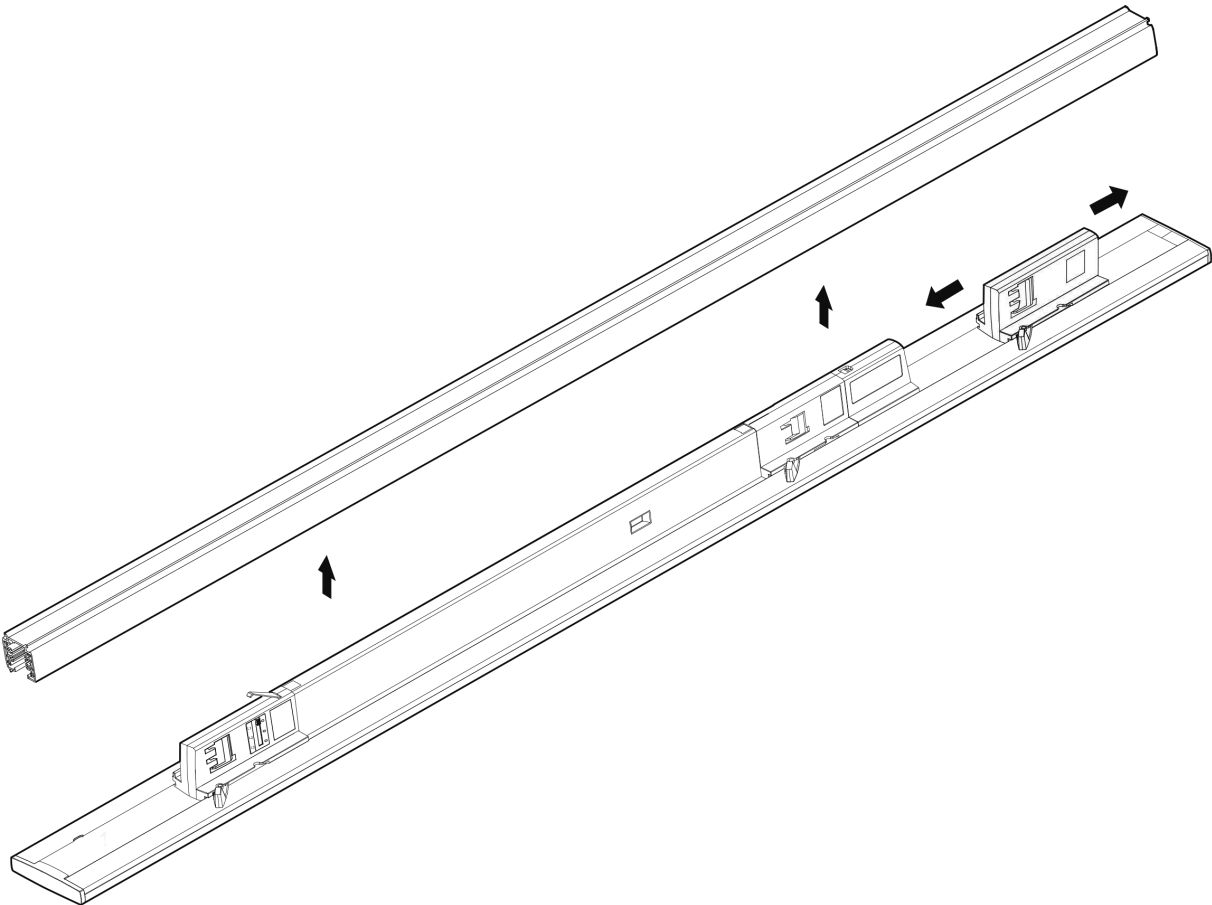


Step 1

Set the power in the power selector DIP switch.




Step 2

Choose the phase/circuit in the phase selector DIP switch.



Step 3

Insert the T-line luminaire into the track rail with the correct direction.



Step 4

Lock the luminaire with the adaptor knob and the fixing knob by rotating the knobs clockwise.



Step 5

Pull down the fixture and swing at an angle of 30 degrees to the left and right per real application request.



Luminaire Characteristics

Production Description

Flexibly Combine with track spotlights.

Application

Commercial

Industrial

Retail

Model :	TH-TL-37-406-30	TH-TL-37-412-55	TH-TL-37-415-65
Dimension :	600x37x60mm	1190x37x60mm	1490x37x60mm
Input Voltage :	220-240VAC	220-240VAC	220-240VAC
Frequency :	50/60Hz	50/60Hz	50/60Hz
Output Power (Select with DIP Switch):	15W/20W/25W/30W	40W/45W/50W/55W	50W/55W/60W/65W
Output Current:	200mA	400mA	450mA
Power Factor:	PFC>0.9	PFC>0.9	PFC>0.9
Lumen Output :	4200lms	7700lms	9100lms
Efficiency:	140lm/w	140lm/w	140lm/w
CRI :	Ra>80 , 90	Ra>80 , 90	Ra>80 , 90
CCT:	3000K, 4000K, 5000K, 6000K, 65000K		
Beam Angle:	60°	60°	60°
UGR:	<19	<19	<19
Ripple:	<5%	<5%	<5%
Type of Protection:	IP20	IP20	IP20
Life Span:	50000Hours	50000Hours	50000Hours
Warranty:	5 Years	5 Years	5 Years
Net Weight:	0.56kgs	0.9kgs	1.1kgs
Pack Qty:	20PCS/CTN	10PCS/CTN	10PCS/CTN
Carton Size:	620x270x240mm	1235x365x150mm	1520x370x170mm