


η-RAINBOW[®] | LED Linear Track Lighting System

LED Linear Track Lighting System

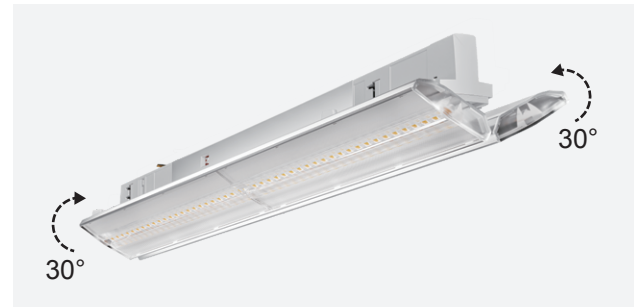

35W/40W/45W/50W , 50W/55W/60W/65W Tilttable

30° x 90° Beam Angle

Compatible with 4 wires track rail system

160lm Per Watt



3000K/4000K/5000K/6000K

Power Selectable with DIP switch

600mm/1200mm/1500mm

The luminaires are compatible with most European standard 3phase 4wires track rail system.

EUROPEAN STANDARD--4 WIRES / 3 PHASES

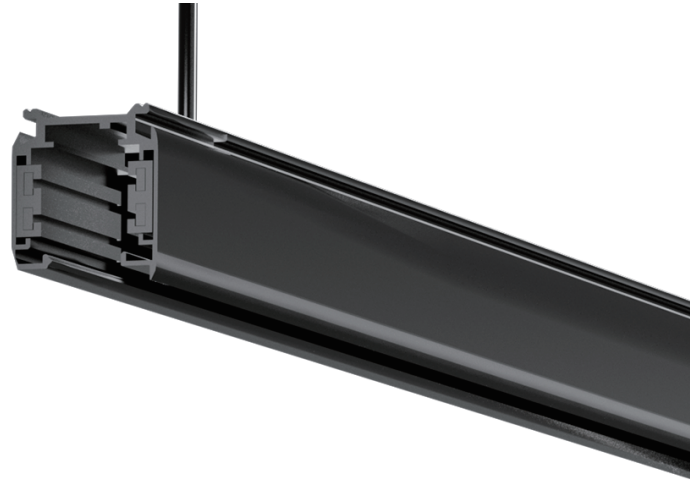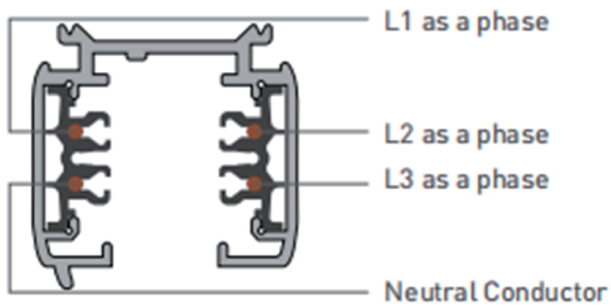


PHASE SELECTION ADAPTOR

Easy to switch back and forth between lights

OUTPUT SELECTABLE LED DRIVER

Adjust the brightness of the light as needed

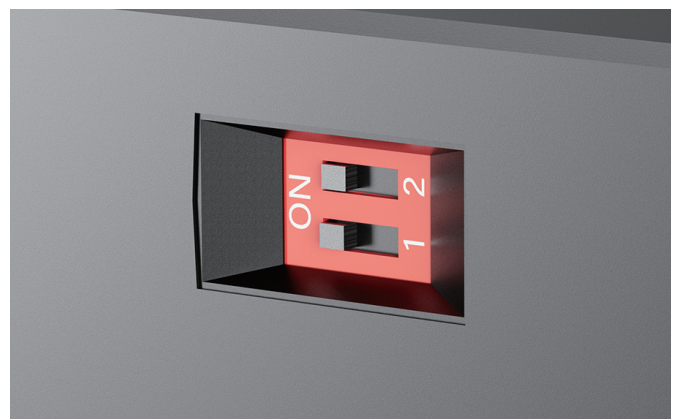

Order Code

Category	Type	Track System	Length	Power	CCT	Wire	Color
	X	X	X	X	X	X	X
TH-TL	100	4	06	50	30	04	WH
			12	65	35		BK
			15		40		
					50		
					60		
					65		



Code Definition

TH-TL= Rainbow Linear Track Light

Length:

06=600mm

12=1200mm

15=1500mm

Power:

30,55=30W,55W

Wire:

04=4 wires

CCT:

30=3000k

35=3500k

40=4000k

50=5000k



57=5700k

65=6500k

Color of the housing:

WH=white shell

BK=black shell

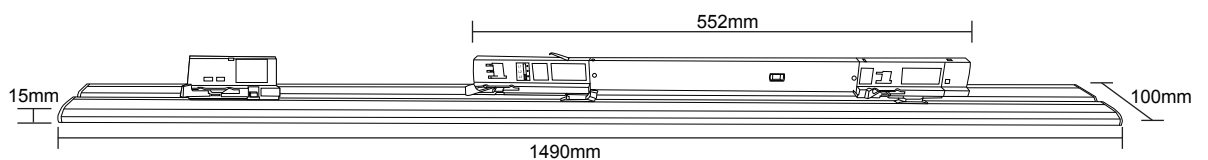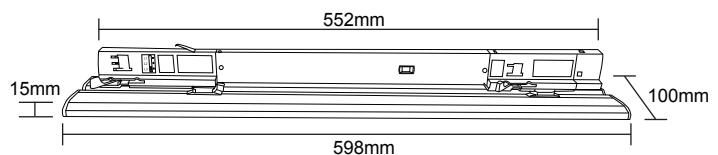


LED Linear Lighting System

Safety notes:


Installation must be performed only by qualified electricians

Make sure that the fixture is disconnected from the AC supply

This luminaire is to be installed in 3phases 4-wires Track rail system

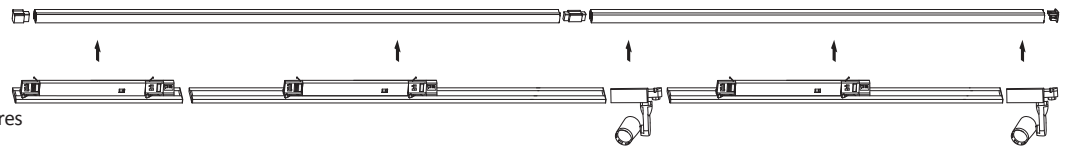


Installation:

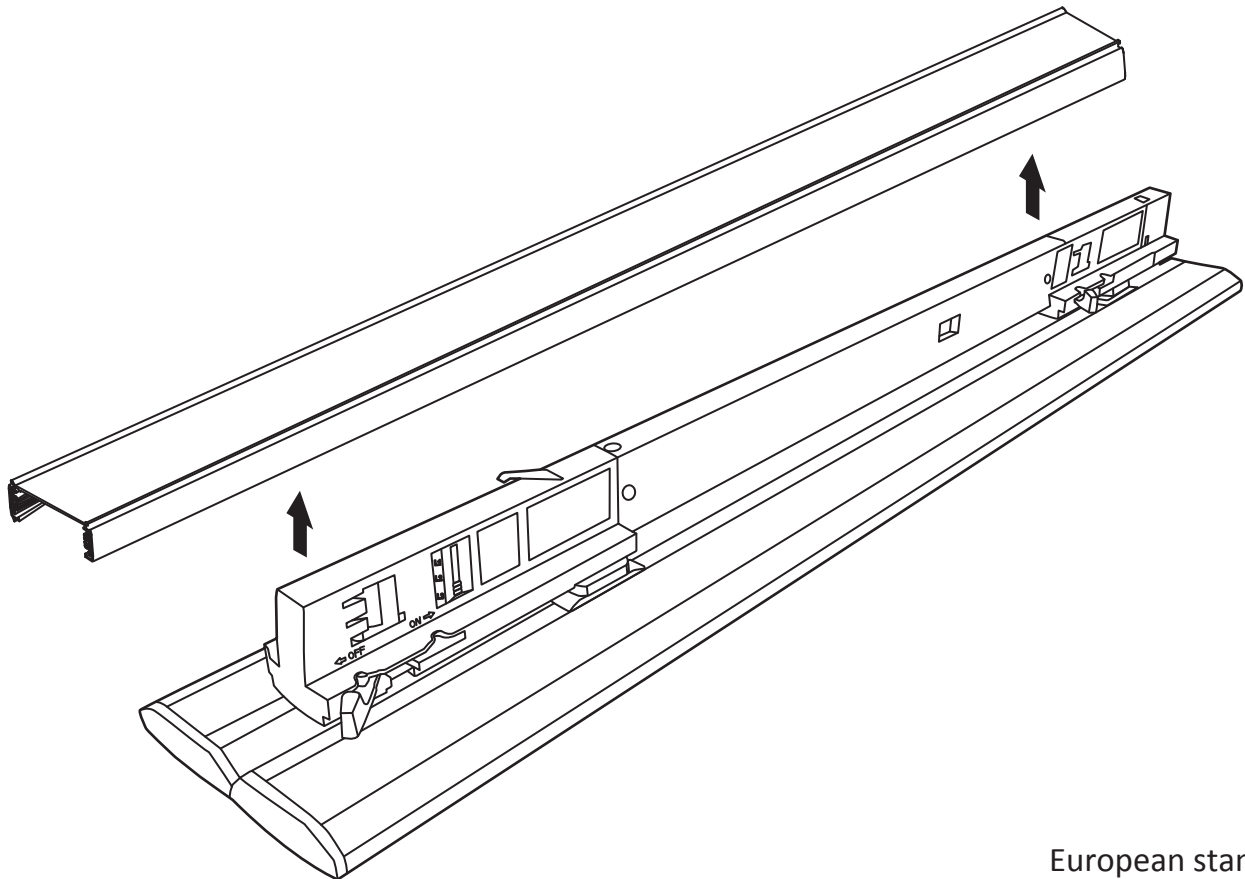

European standard


Step 1

Set the power in the power selector DIP switch.

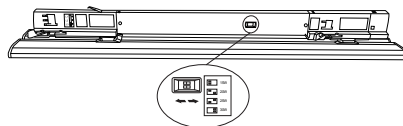


Step 2

Choose the phase/circuit in the phase selector DIP switch.

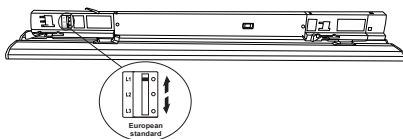

Step 3

Insert the luminaire into the track rail with the correct direction.

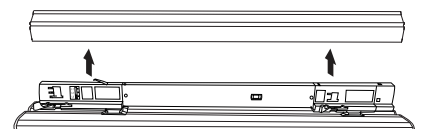


Step 4

Lock the luminaire with the adaptor knob and the fixing knob by rotating the knobs clockwise.



Step 5

Pull up/down the luminaires at an angle of 30 degree max per real application request.



Luminaire Characteristics

Production Description

Flexibly Combine with track spotlights.

Application

Commercial

Industrial

Retail



Model No.	THTL-100-406-50	THTL-100-415-65
Dimension	600x100x60mm	1490x100x60mm
Input Voltage	220-240VAC	220-240VAC
Output Power	35W/40W/45W/50W	50W/55W/60W/65W
(Select with dip switch)		
Output Current	400mA	450mA
Frequency	50/60Hz	50/60Hz
PFC	>0.9	>0.9
Lumen	9000lms	10400lms
Efficiency of Fixture	160lm/w	160lm/w
Color Temperature	3000K / 4000K / 5000K / 6000K / 6500K	3000K / 4000K / 5000K / 6000K / 6500K
CRI	Ra>80, 90	Ra>80, 90
LED Chip	SMD	SMD
Beam Angle	30°	30°
Ripple	<5%	<5%
Type of Protection	IP20	IP20
Life Span	50000Hours	50000Hours
Warranty	5 Years	5 Years